




[Fig 11] Attach Bumper assembly to bumper mounting plates on ends of frame [Fig 3 & 4]

- (2) 12mm x 30mm Hex Bolts
- (4) 12mm Flat Washers
- (4) 12mm Lock Washers
- (2) 12mm Nylon Lock Nuts

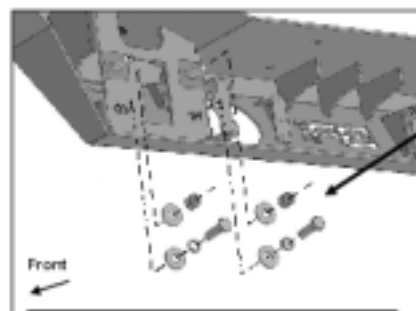

[Fig 12] Driver/left side of Bumper installed on JL model